

# PRODUCT DATASHEET

## Confidex Captura™



Captura steps into an unprecedented level in both C1G2 tag security and usability; the tag is extremely easy and fast to attach

### ELECTRICAL SPECIFICATION

#### Device type

Class 1 Generation 2 passive UHF RFID transponder

#### Air interface protocol

EPCGlobal Class1 Gen2 ISO 18000-6C

#### Operational frequency

Global 865 - 928 MHz

#### IC type

NXP UCODE G2XM

#### Memory configuration

EPC 240 bit; User 512 bit; TID 64 bit

#### EPC memory content

Unique number encoded as a default

#### Read range (2W ERP)\*

EU (mounted on metal structure) up to 10 m / 33 ft

US (mounted on metal structure) up to 8 m / 26 ft

#### Applicable surface materials\*

Metallic items

\* Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power according to ETSI EN 302 208 (2W ERP). Different surface materials may have an effect on performance.

### MECHANICAL SPECIFICATION

#### Encapsulation materials

High quality engineering plastics.

#### Weight

22 g

#### Delivery format

Single

#### Amount in box

500 pcs

#### Dimensions

57,5 x 19 x 20 mm / 2.26 x 0.75 x 0.79 in



### ENVIRONMENTAL RESISTANCE

#### Operating temperature

-30°C to +70°C / -22°F to +158°F

#### Ambient temperature

-30°C to +70°C / -22°F to +158°F

#### IP classification

IP67

#### Weather ability

Good, including UV-resistance and sea water

#### Chemical resistance

No physical or performance changes in:

- 168 hour Motor oil exposure

- 168 hour Salt water exposure (salinity 10%)

#### Expected lifetime

Years in normal operating conditions

*Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.*

## PERSONALIZATION OPTIONS

### Pre-encoding

- Customer specific encoding of EPC or user memory. Locking permanently or with password.

### Customized data label


- Customer specific layout including logo, text, numbers, barcodes.

## INSTALLATION INSTRUCTIONS

Polarization of Confidex Captura™ is depending on the attached item. Therefore it should be tested at the final application to gain the best performance.

Confidex Captura's patent pending design exploits the tagged object's metal for its performance.

- Tag's performance is only a fraction of the optimum performance if reading the tag with the hook open.
- The optimum performance will be achieved when the tag is installed onto a metal structure such as roll cage wiring. Select a location in a way that there's no metal on the sides of tag if possible.

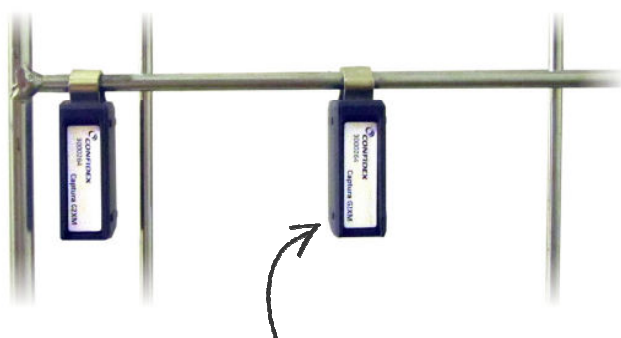

If possible please choose a wider slot where to attach the tag instead of the narrow one.

### Fixing procedure

1. Tag is delivered with hook open. Fix the tag on metallic item.
2. Close the hook by pressing it firmly, hook will snap and cannot be opened anymore without breaking the tag. Tag is now ready to be used.

## ORDER INFORMATION

**Product number:** 3000264

**Product name:** Confidex Captura™ Global G2XM

For other versions, additional information and technical support contact Confidex Ltd.

### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.