




BLE Beacon


Powerful Bluetooth Low Energy device acting as a reference point (beacon) within a BLE V2 setup, where tags scan beacons and then report the data

Key features

- Cost-effective deployment and maintenance
- Wireless setup
- Firmware upgradeable
- Built-in accelerometer
- LED visual indicator
- Attachable form factor
- Designed & manufactured in EU
- Each unit carefully tested
- 46+ months autonomy, depending on scenario
- Powered by replacable coin batteries (2x1000mAh)
- Powered by 2000mAh battery rechargeable via USB-C (optional)
- 1 year warranty
- CE certified
- Dimensions 100 x 46 x 22.3mm
- 66g weight
- IP54 ready for industrial areas
- IP67 optional
- Operating temperatures:
 - -30°C ÷ 60°C (coin)
 - -10°C ÷ 40°C (LiPo)
 - -20°C ÷ 45°C (optional Lipo)
- Available in white and gray (other colours upon request)

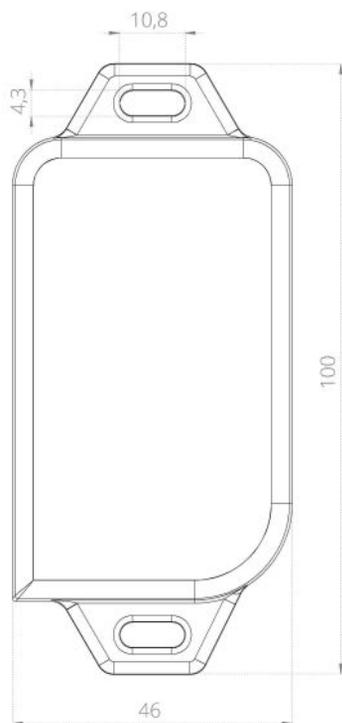

Front view

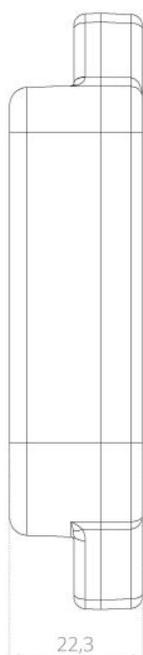

Side view